



WET®

E-mail: wet@wet.co.it
www.wet.co.it

INSTALLATION LTT

Make sure installation is done by a qualified electrician

Make sure the electricity wiring that comes from the floor has a minimum fixture / attachment of 60 Newton (= +/- 6 Kg)

Make sure the electricity wiring that comes from the floor has a minimum watertightness protection of IPX5

Fix the illumination-sets in the OUTER (smallest 40mm) holes, having the wiring go in between the shells of the bathtub, and fix properly.

Lead the electricity wiring towards the IPX5-box through cableclamb (A) and fix properly so that a fixture / attachment of 60 Newton is achieved.

Lead the electricity wiring into the IPX5-box through the cableclamb (B) and fix the cableclamb properly so that a IPX5 watertightness protection is achieved.

For LT- dimmer only

Drill a hole into the rim of the bathtub of 20mm and insert from above the *on/off switch.

When needed fix with SILICONEN-glue in order to obtain a watertight fixture / attachment between the bathtub and the switch.

Lead the wiring into the IPX5-box through cableclamb (C) and fix the cableclamb properly so that a IPX5 watertightness protection is achieved.

For CR Tele only

The sensor has to be placed in between the shell of the tub, at the foot side of the tub. "free position".

Follow the connection scheme that is found inside the cover for further (internal) connection of wiring.

At completion of all the steps, fix the bathtub to the floor so that no accidental movement is possible, using the included fixture set*.

It is sufficient to put LTT 'over the 2 bolts. NO further fixture is needed.

USER INSTRUCTIONS

SPECIFIC - LT-dimmer version

make sure you have a "ground/earth" connection (without this connection, LT-dimmer cannot function) Before you close the IPX5-box, you have to fine-tune the transformer > the touch-button will now function as on/off when touched shortly, and will function as a dimmer-button when touched longer.

SPECIFIC - CR-Multichrome

you will find 3 pre-programmed color-cycles that will seguently turn on when you touch the black button (warm/cold&mixed cycle) The black button will also turn on/off the system. When you touch the colored buttons, you can mix your own color. A maximum of 2 full colors is possible, when overheat, the system will automatically turn off.

For automatic mode, just restart the system.

POWERSUPPLY

PRI - 230/240V@50/60Hz / SEC - max 11,5V - max 60W / (0.75/2.5mmq 6mm Ø- IPX5 - 60N) IP66 sides / IP44 bottom

PRE-INSTALLATION

Follow the established safety rules of the country of installation - electricity wiring – with minimum protection of IPX5-60N

POLYETHYLENE (PE)

Traditional bathtubs are made of PMMA. LIGHT is made of PolyEthylene (PE). PE is totally different than PMMA, and has completely different characteristics.

It is therefor absolutely necessary to read and follow these instructions :

PE has a hardness of "D/41-50 shore"

which is absolutely less than most other plastics, including PMMA, and it is for this reason that LIGHT is finished with a superficial texture. This texture will help to avoid scratches. LIGHT has been checked on its perfect conditions before leaving our establishment. LIGHT is packed in export-quality packaging. We did everything to make a perfect product, with a perfect protection. After installation, and during normal use, LIGHT does not scratch, but due to the low hardness coefficient of PE, LIGHT can however not be garantied against (minor) scratches, nor when appear during use, nor those present at purchase.

PE is a soft material

PE will always be slightly deformable, and when you enter a LIGHT tub, the bottom will slightly deform. This is normal, and will even be more present with hot water then with cold water. In fact, LTT is NOT a 'standing-up shower-bathtub, but a 'lying-down/relax bathtub.

NEVER put in contact mentioned products PE


Dichloromethane, hydrocarbons fluorine, perchloroethylene, trichloroethylene, acetone, gasoline, benzol, ethylene, ozone, toluol. For normal cleaning please use normal water, even without soap. After cleaning one can dry with a soft towel. NEVER use rough cloth or else in order to avoid scratching.

PE is 100% recycable and can be put with the empty bottles after its lifecycle. In some countries it does have to be presented in smaller pieces.

The maximum temperature of PE is 40 à 45°C

It is severely forbidden to put water inside with higher temperatures. A comfortable bathing temperature is between 38° till 42°C. Higher temperatures can cause serious burning-injuries, and the maximum temperatures are therefor absolutely sufficient to bath in comfort.

DO NOT fill LIGHT first with boiling water in order to afterwards 'add cold water > but fill with ready mixed water. Temperatures higher than 60°C can destruct PE and LIGHT is NOT garantied against deformation due to too high temperatures.

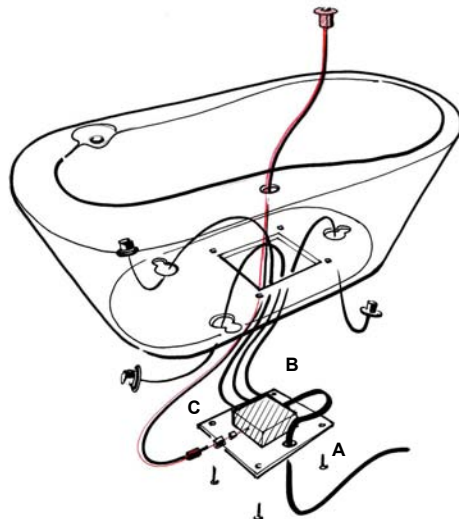



WET®

E-mail: wet@wet.co.it
www.wet.co.it

PRE-INSTALLATION LTT

follow the established safety rules of the country of installation

